



# Energy Emissions of Spark Discharge Under Water

T. Izdebski<sup>1</sup>, M. Dors<sup>1</sup>, J. Mizeraczyk<sup>1,2</sup>

<sup>1</sup> Centre for Plasma and Laser Engineering, The Szwalski Institute of Fluid Flow Machinery, Polish Academy of Sciences, Fiszerza 14, 80-231 Gdańsk, Poland


<sup>2</sup> Dept. of Marine Electronics, Gdynia Maritime University, Morska 83, 81-225 Gdynia, Poland

## Motivation

- The recent focus of electrohydraulic discharges is on bacteria and microorganism inactivation,
- Spark discharge in water can efficiently inactivate microorganisms,
- Physics and chemistry of spark discharges is little known,
- There is no consensus over plasma formation mechanism and all the more on biocidal effects leading to sterilization,
- To fully understand which of these effects of spark discharge has the main influence on bacteria and microorganism inactivation, first we need to understand the distribution in so called electrohydraulic discharge.

## Methods

- The measurements were performed on deionized water as well as on river water to determine the influence of various chemical and organic compounds present in real river water,
- The UV spectra was measured and water Andor spectrometer. The spectrometer was set to integration time of 600 ms.

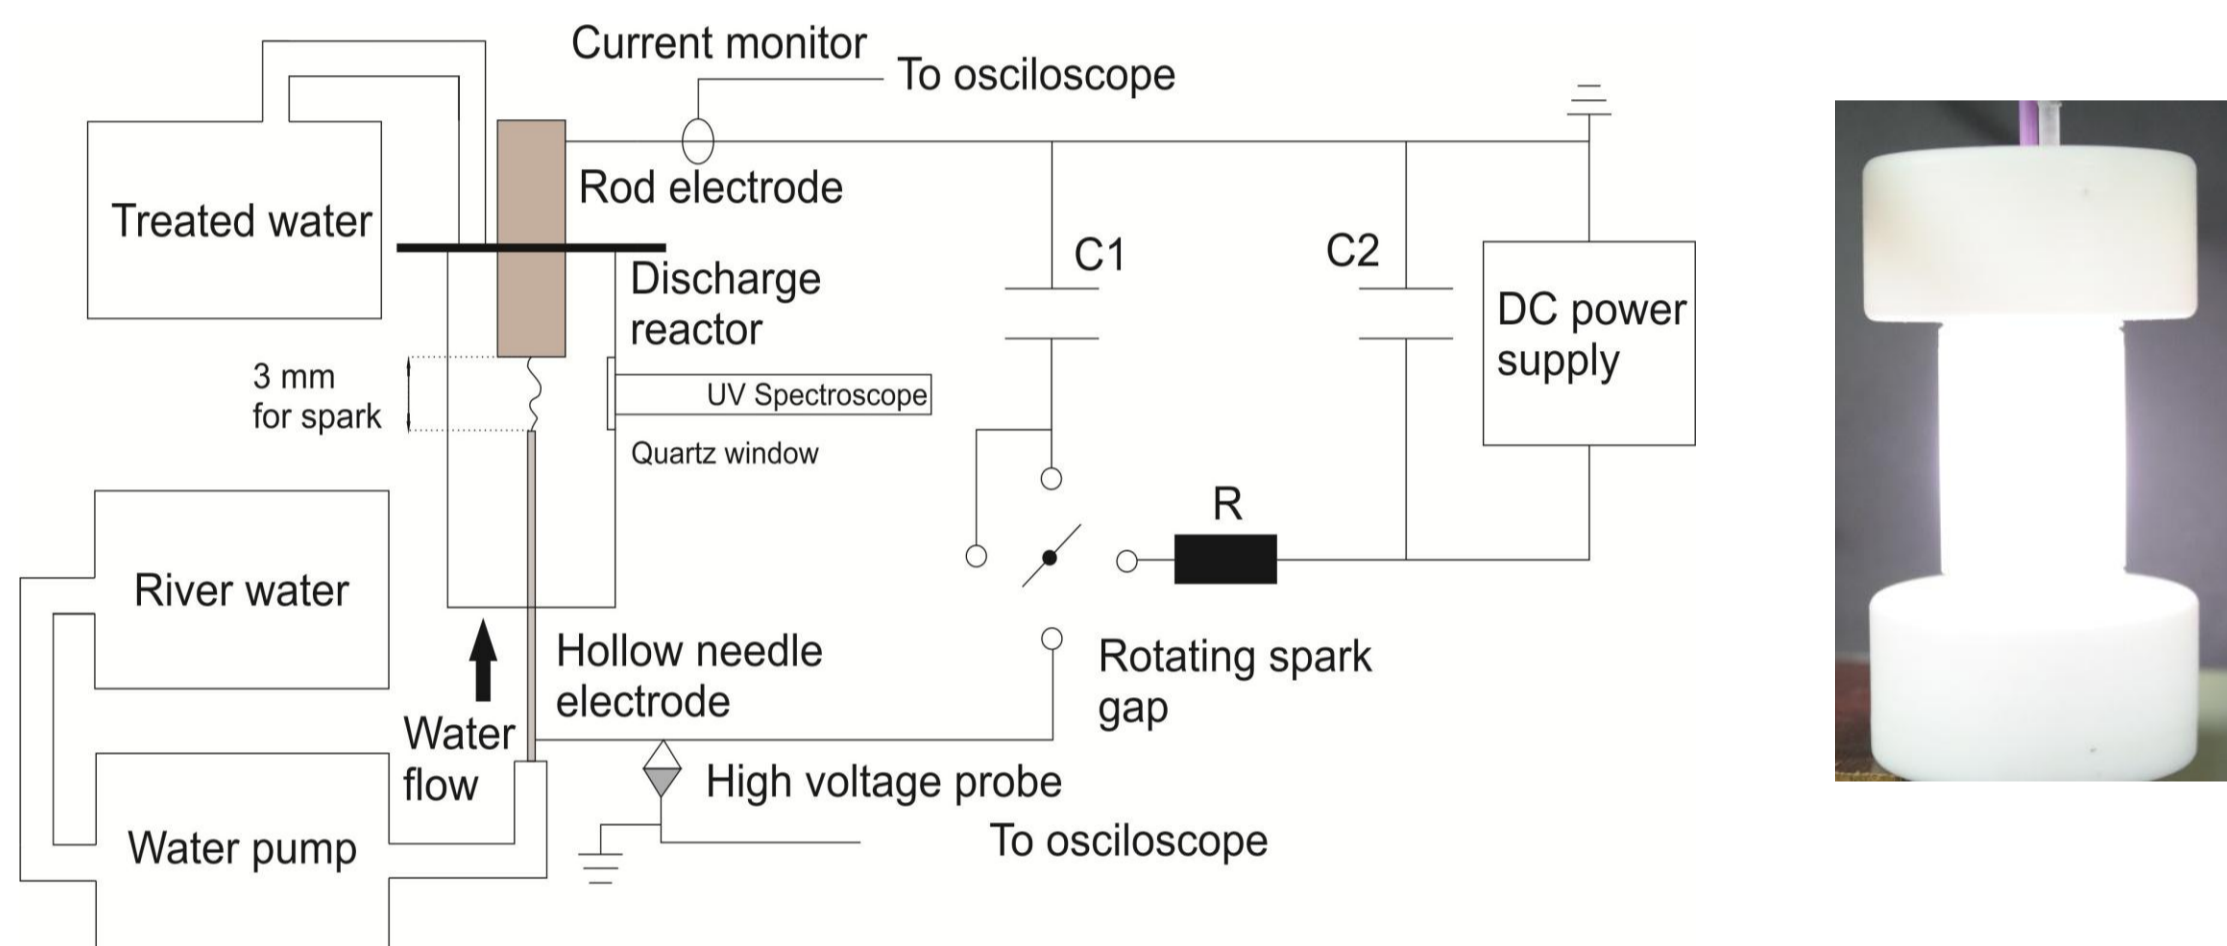

### DISCHARGE CHARACTERISTIC


- Pulsed spark discharge,
- Applied voltage: 15-17 kV,
- Pulse repetition rate: 50 Hz,
- Averaged pulse energy: 1.4 J,
- Discharge power: 60 W.

### REACTOR PARAMETERS

- Cylindrical reactor made of PTFE,
- Inner diameter: 25 mm,
- High voltage electrode -> Stainless steel hypodermic needle, inner diameter: 1.6 mm,
- Outer diameter: 2 mm,
- Grounded electrode -> Stainless steel rod, diameter: 5 mm,
- Gap between the electrodes: from 3 mm.

## Input Energy

### CURRENT-VOLTAGE CHARACTERISTICS

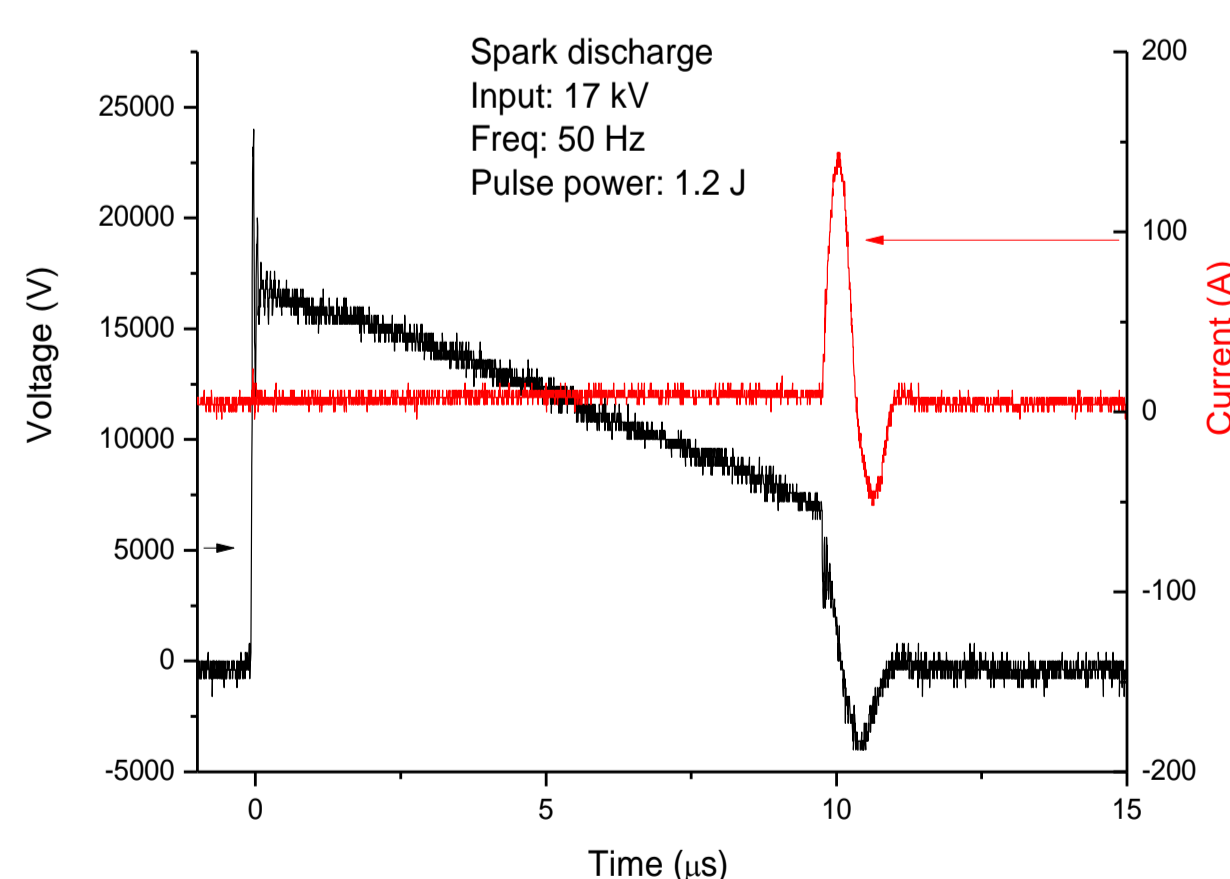

$$E_p = \int U(t)I(t)dt$$

Spark discharge power calculated was **60 W**. This values is averaged over 100 pulses.

## Thermal Energy Emissions

Thermal energy emission from plasma emission was calculated according to Jule's law:

$$Q = c \cdot m \cdot (T_k - T_p) \quad [\text{J}],$$

where:

c – specific heat of the medium,

m – mass of the medium,

T<sub>p</sub> – initial temperature,

T<sub>k</sub> – final temperature.

$$Q = 4187 \frac{\text{J}}{\text{kg} \cdot \text{K}} \cdot 0.026 \text{kg} + 300 \frac{\text{J}}{\text{kg} \cdot \text{K}} \cdot 0.0042 \text{kg} \cdot (21.5 \text{K} - 13.5 \text{K}) = 1097.33 \text{J}$$

**Thermal Power:**

Thermal power emitted during 30 s of the electrohydraulic spark discharge was **36.5 W**.

## Conclusions

- Results of measurements show that 36.5 W, which is more than 50% of energy delivered to the spark discharge, is spent for water heating
- Acoustic power emission is 0.4 mW which is comparable to loud speaking
- Rest of the discharge power, i.e. 23.4 W, is distributed among UV/Vis radiation and chemical reactions in the reactor.

## Results

### Acoustic Energy Emissions

#### FREQUENCY DISTRIBUTION OF SOUND INTENSITY LEVELS

| Frequency [Hz] | Sound intensity level [dB] | Sound intensity [W/m <sup>2</sup> ] |
|----------------|----------------------------|-------------------------------------|
| 1              | 25.9                       | 3.89E-10                            |
| 2              | 38.5                       | 7.079E-09                           |
| 4              | 49.8                       | 9.55E-08                            |
| 8              | 52.2                       | 1.66E-07                            |
| 16             | 51                         | 1.259E-07                           |
| 31,5           | 51                         | 1.259E-07                           |
| 63             | 48                         | 6.31E-08                            |
| 125            | 50.4                       | 1.096E-07                           |
| 250            | 48                         | 6.31E-08                            |
| 500            | 50.9                       | 1.23E-07                            |
| 1000           | 57.1                       | 5.129E-07                           |
| 2000           | 74.8                       | 3.02E-05                            |
| 4000           | 79.5                       | 8.913E-05                           |
| 8000           | 80.4                       | 0.0001096                           |
| 16000          | 78.2                       | 6.607E-05                           |
| Log sum=       |                            | <b>0.2964 mW/m<sup>2</sup></b>      |



Acoustic Power measured:

$$P = \frac{I}{e^{-mr}} 4\pi r^2 = \frac{0,0002964 [\text{W} / \text{m}^2]}{e^{-0.3}} 4\pi \cdot 0.3 [\text{m}]^2 = (0.4 \pm 0.05) \text{mW}$$

Frequency distribution of sound intensity generated by the electrohydraulic discharge reactor at a distance of 30 cm.

### UV/Vis Spectra Emissions

#### UV/VIS SPECTRA OF SPARK DISCHARGE UNDER WATER

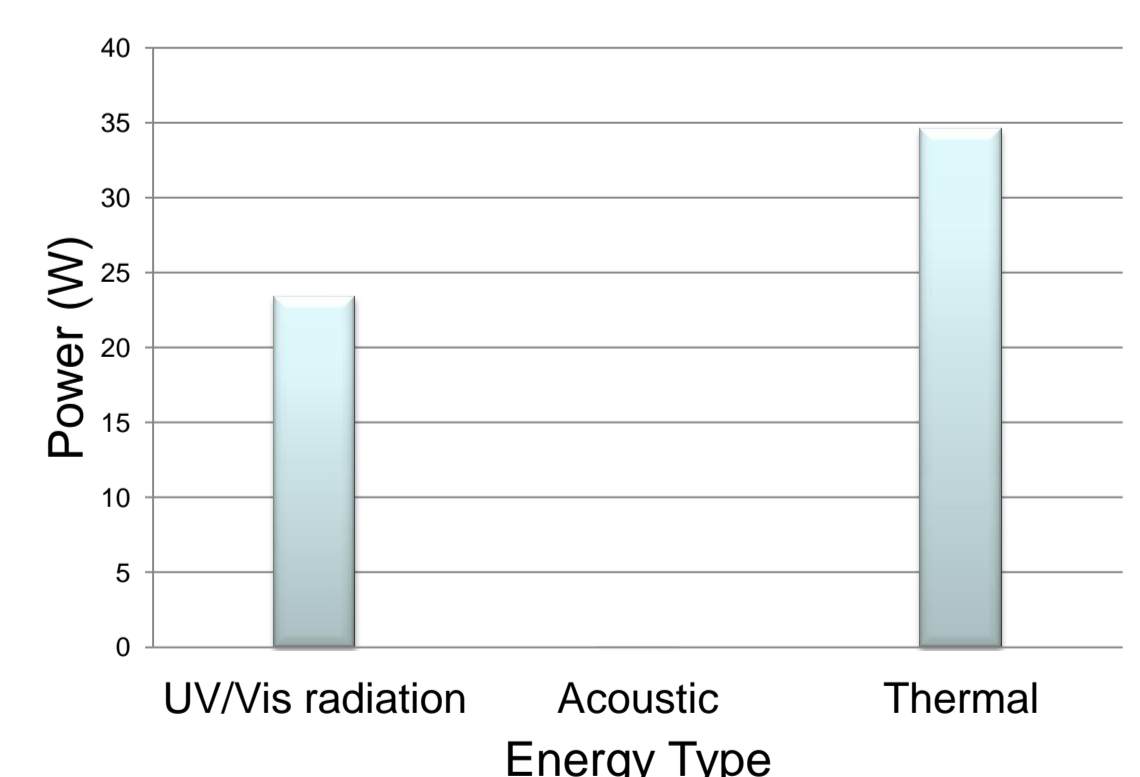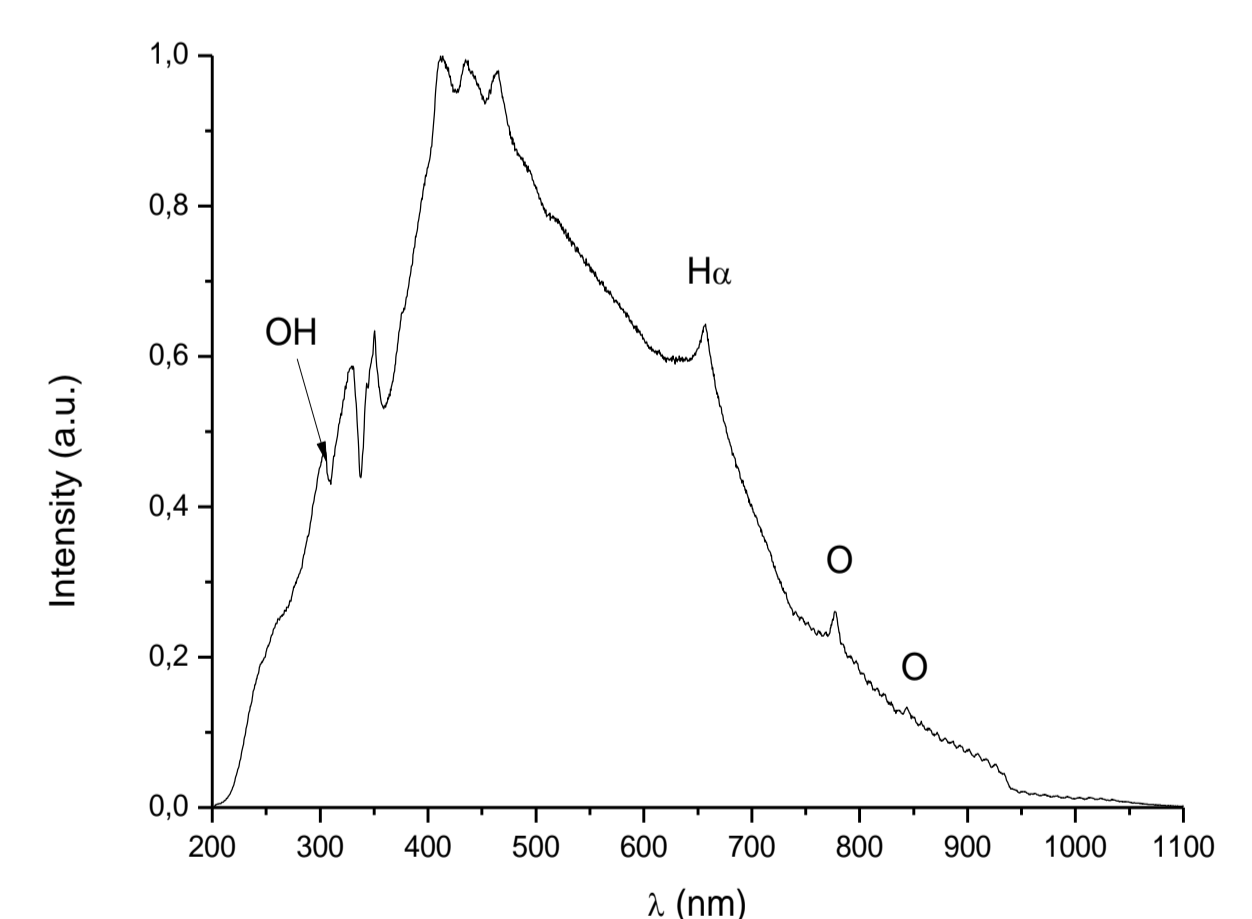

Energy distribution in electrohydraulic spark discharge

## Acknowledgments

This research work was supported by the European Social Fund, the State Budget and the Pomorskie Voivodeship Budget according to the Operational Programme Human Capital, Priority VIII, Action 8.2, Under-action 8.2.2: 'Regional Innovation Strategy' within the system project of the Pomorskie Voivodeship "InnoDoktorant – Scholarships for PhD students, Vth edition" and by the National Center of Science according to decision number DEC-2011/01/N/ST/8/05300